

STERLING OMS DEVELOPMENT TOOLKIT

Sterling OMS Development ToolKit

Table of Contents

1.	Introduction.....	2
2.	Purpose	3
3.	Overview.....	3
4.	Session	3
4.1	New session	4
4.2	Switch session:.....	5
5.	OMS Environment Configuration	5
6.	Database Environment configuration	7
7.	Pages.....	9
8.	API Tester.....	9
8.1	Saved API's	11
9.	Query Client.....	12
9.1	Saved Query Client.....	13
10.	Sterling Docs	15
10.1	Java Docs	15
10.2	XAPI Docs.....	15
11.	App Launcher	16
12.	Local Build	17
12.1	Start Server	17
12.2	3 rd Party JAR.....	19
12.3	Build WAR/ EAR	20
12.4	Launch App Manager	21

1. Introduction

Maegham OMS Development Kit is an integrated desktop application designed to simplify and accelerate IBM Sterling OMS development and local environment management. It serves as a unified workspace where developers can create, configure, build, and manage Sterling OMS components without switching between multiple tools.

The application provides session-based development, allowing users to create and manage multiple working sessions. Developers can easily configure Sterling environments, manage database connections (Oracle, PostgreSQL, and DB2), and access essential documentation such as Java Docs and XAPI Docs directly from the application. Page editor workspace where user can open and edit configuration files, scripts, and text-based resources. User can build WAR/ EAR / JAR, Start or stop the server, Install / Uninstall Third party jars and Launch Local Application manger. By centralize this feature developer can integrate all the functionality, handle errors and improve productivity.

This application is intended for Sterling OMS developers and support teams who require a consistent, efficient, and easy-to-use platform for local development, testing, and environment management.

2. Purpose

Maegham OMS Development Kit provides a unified, efficient, and user-friendly platform for local IBM Sterling OMS development and environment management. The tool is designed to eliminate the complexity of manual setup, custom scripting, and fragmented tooling commonly encountered during Sterling OMS development. By consolidating environment configuration, database setup, build management, server control, and documentation access into a single application, the Maegham OMS Development Kit enables developers to focus on development and testing rather than infrastructure and configuration tasks.

3. Overview

Maegham OMS Development Kit provides features that support the complete IBM Sterling OMS local development lifecycle—from environment setup to build, deployment, and server management. It allows users to create sessions and configure Sterling environments and databases from a single, unified interface. The application supports building WAR, JAR, and EAR files, as well as controlling Sterling servers (start/stop). It provides direct access to JavaDocs, XAPI documentation, and application launchers. Overall, it simplifies development workflows, reduces manual effort, and improves developer productivity.

4. Session

Session tab is used to create and manage development sessions within the Maegham OMS Development Kit. Each session represents an independent working context that holds Qry client workspace, saved API's and saved pages. This allows users to work on multiple Sterling OMS projects or environments without configuration conflicts. Sessions can be created, opened, switched, or closed easily for developer. The Session tab helps maintain isolation, consistency, and better control over development activities.

4.1 New session

New Session allows users to define and initialize a new development session within the Maegham OMS Development Kit. Each new session operates as an isolated working context, ensuring that saved APIs, pages, and workspace settings do not conflict with other sessions. This feature enables developers to seamlessly start work on new Sterling OMS projects or environments while maintaining consistency, separation, and efficient session management.

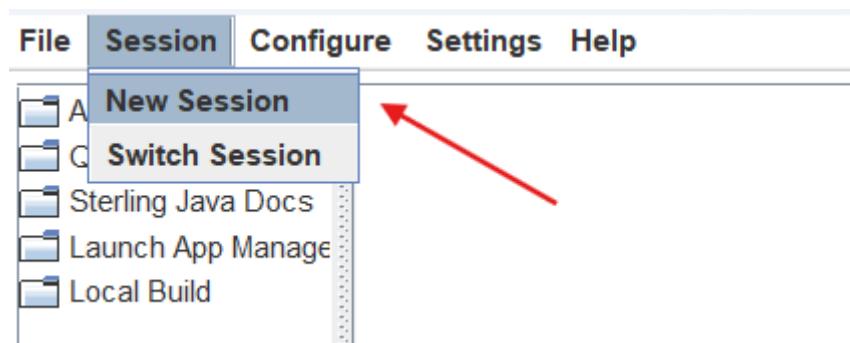


Figure 4.1.1: click session, then new session

Pop up will show to create a session.

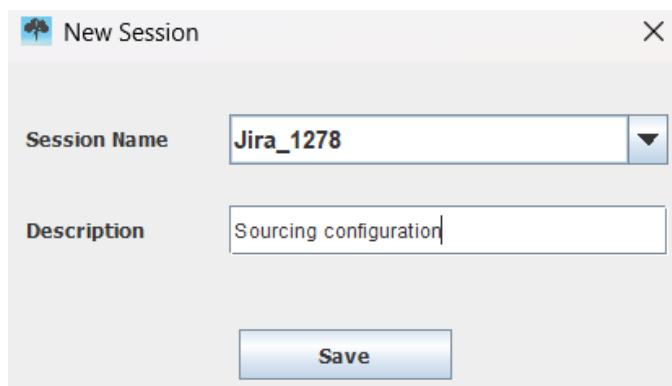


Figure 4.1.2: save new session with session name and description.



Figure 4.1.3: Maegham Dev Kit opens with Jira_1278. Jira_1278 is the session name.

4.2 Switch session

Switch Session allows users to seamlessly move between existing development sessions within the Maegham OMS Development Kit. By switching sessions, the application loads the selected session's Qry client workspace, saved APIs, saved pages. This enables developers to work on multiple Sterling OMS projects or environments.

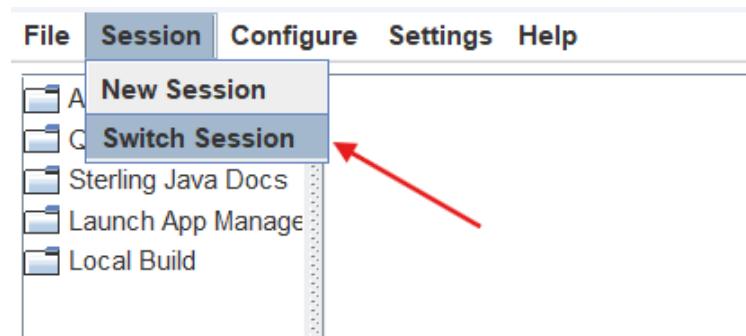


Figure 4.2.1: click session, then switch session

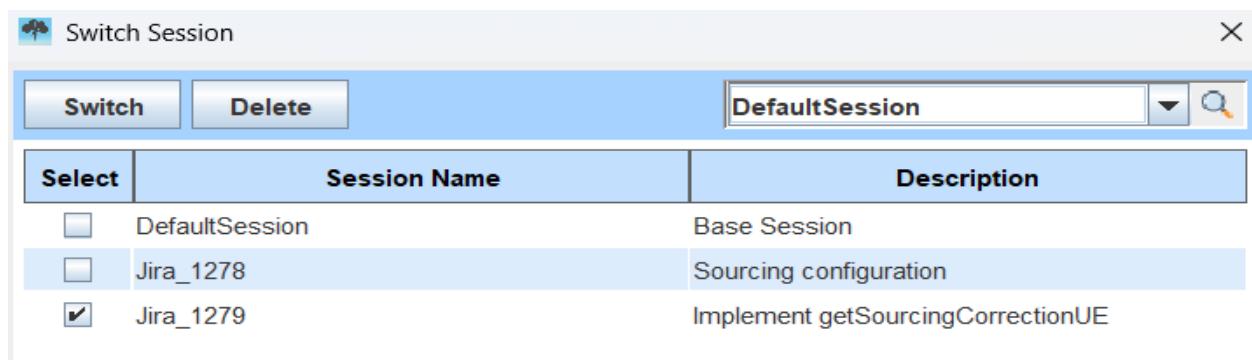


Figure 4.2.2: Select a session, click switch button



Figure 4.2.3: Application loads the selected session. The session name is displayed in the top-right corner.

5. OMS Environment Configuration

OMS Environment Configuration screen allows users to create and manage Sterling OMS environment connections. It supports configuring environment details such as URL, credentials, version, and API type (Servlet or REST). Multiple SSL modes and certificate options are available for secure communication. Users can configure local, Docker, or traditional deployments with required paths and server details. Saved environments can be tested, edited, and reused from the configurations list.

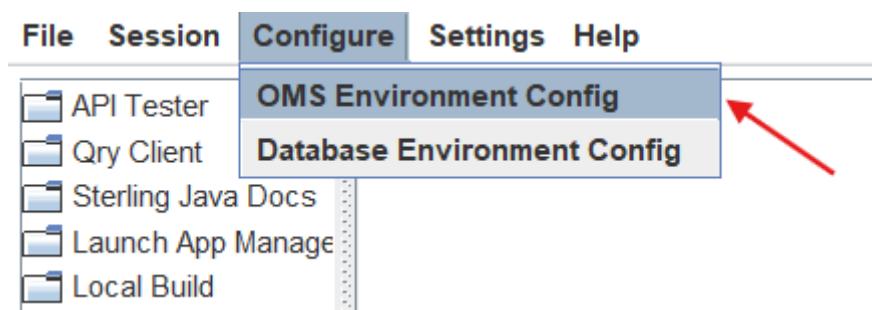


Figure 5.1: configuration, then OMS Environment config.

OMS Environment Configuration tab is opened.

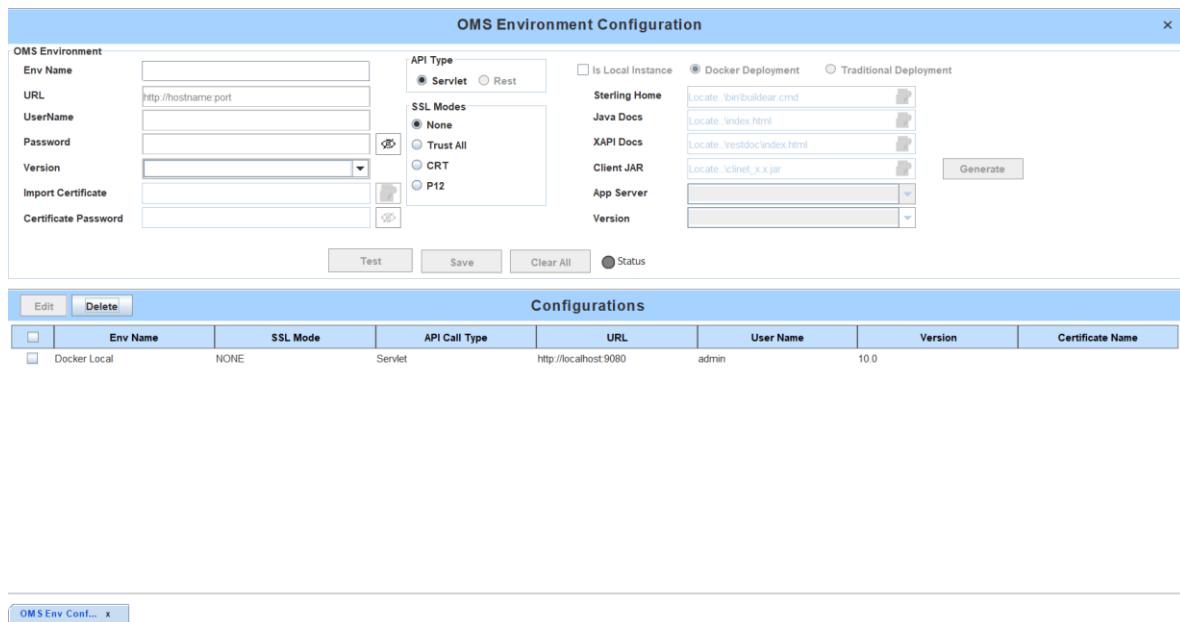


Figure 5.2: OMS Environment configurations

Env Name: Logical name to identify the OMS environment (e.g., Dev, QA, Docker Local).

URL: Base URL of the Sterling OMS instance including hostname and port.

User Name / Password: Credentials used to authenticate API calls to the OMS environment.

Version: Sterling OMS application version for the configured environment.

Import Certificate Path to the SSL certificate file (required for CRT or P12 modes).

Certificate Password: Password for the imported certificate (if applicable)

API Type

- **Servlet** – Uses traditional servlet-based APIs.
- **REST** – Uses REST-based APIs.

SSL Modes

- **None** – No SSL configuration.
- **Trust All** – Trusts all SSL certificates (recommended only for local/dev).
- **CRT** – Uses a certificate file for SSL communication.
- **P12** – Uses a PKCS12 (.p12) certificate file.

Deployment Type

- **Is Local Instance** – Local Sterling installation.
- **Docker Deployment** – Sterling running inside Docker.

- **Traditional Deployment** – Installed on an external application server.

Sterling Home: Path to the Sterling OMS installation or build command location.

Java Docs: Path to Sterling Java documentation index file.

XAPI Docs: Path to Sterling XAPI documentation index file.

Client JAR: Path to the Sterling client JAR used for API execution.

App Server: Application server type (e.g., WebSphere, Weblogic, JBoss).

App Server Version: Version of the selected application server.

Test: Validates the OMS connection using the provided details.

Save / Clear All: Save the configuration or reset all input fields.

Configurations Table: Displays all saved OMS environments with options to **Edit** or **Delete**.

6. Database Environment configuration

Database Configuration screen is used to define, test, and manage database connections required for Sterling OMS. It supports multiple database types and allows users to reuse configurations across sessions and environments.

Database Tabs

- **Oracle** – Configure Oracle database connections.
- **DB2** – Configure IBM DB2 database connections.
- **PostgreSQL** – Configure PostgreSQL database connections.
- **IBM DB Query** – Execute and manage IBM DB-specific queries.

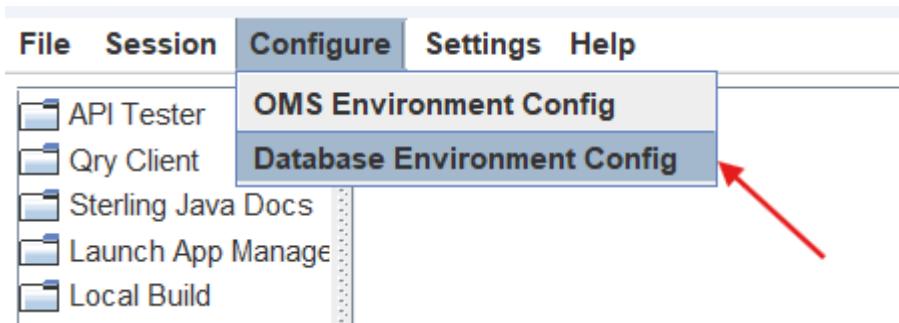


Figure 6.1: Configure, then Database Environment Config

Database Configuration tab is opened

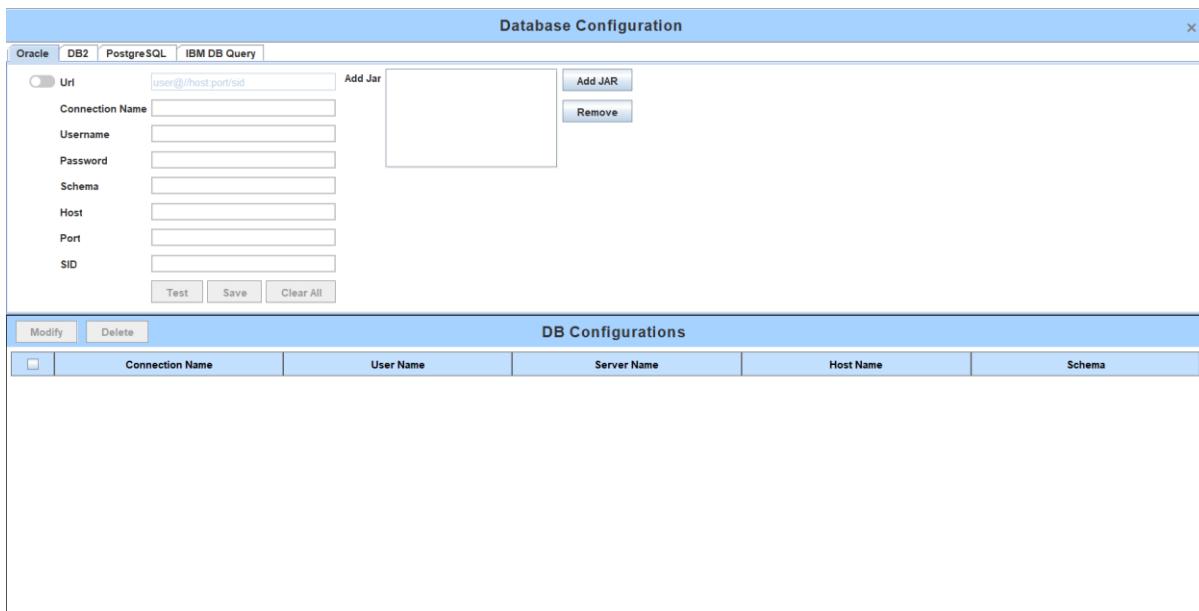


Figure 6.2: Database Configuration for Oracle

URL: Complete database connection URL (auto-generated or manual).

Connection Name: Logical name to identify the database connection (e.g., Dev_Oracle, QA_Postgres).

Username / Password: Credentials used to connect to the database.

Schema: Database schema used by Sterling OMS.

Host: Database server hostname or IP address.

Port: port number on which the database service is running.

SID: Oracle System Identifier (applicable only for Oracle databases).

Add JAR: Add JDBC driver JAR files required for the selected database type.

Remove: Remove selected JDBC driver JAR from the configuration.

Database Configuration

Oracle DB2 PostgreSQL IBM DB Query

Url: jdbc:db2://host:port/database

Connection Name:

Username:

Password:

Schema:

Host:

Port:

Add Jar:

Remove:

Test:

Save:

Clear All:

DB Configurations

<input type="checkbox"/>	Connection Name	User Name	Server Name	Host Name	Schema
<input type="checkbox"/>					

Figure 6.3: Database Configuration for DB2

Database Configuration

Oracle DB2 PostgreSQL IBM DB Query

Url: jdbc:postgresql://host:port/schema

Connection Name:

Username:

Password:

Schema:

Host:

Port:

Add Jar:

Remove:

Test:

Save:

Clear All:

DB Configurations

<input type="checkbox"/>	Connection Name	User Name	Server Name	Host Name	Schema
<input type="checkbox"/>					

Figure 6.4: Database Configuration for PostgreSQL

IBM DB Query

Configure the subscriber database connection for the Docker environment.

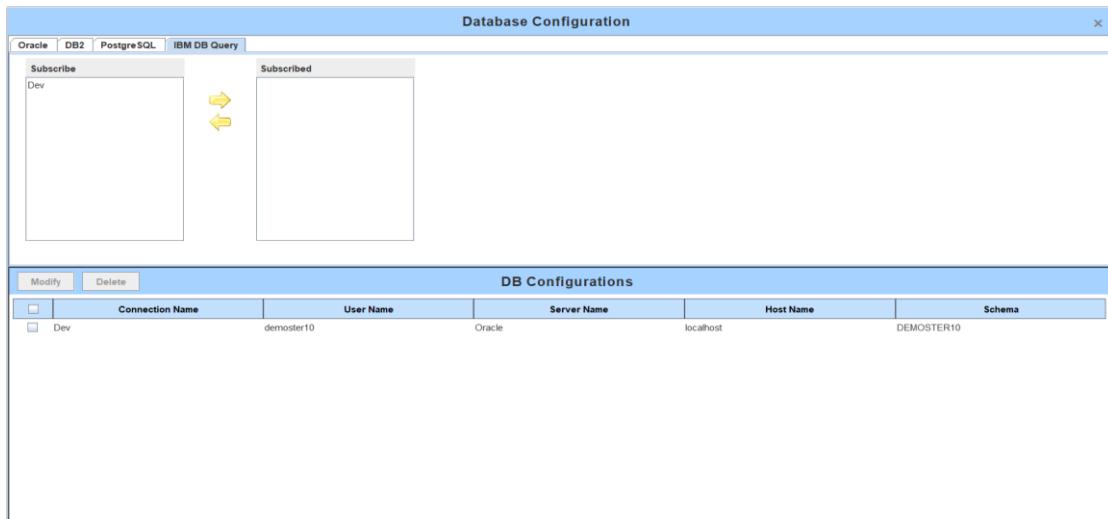


Figure 6.5: Subscribe connection for DB Query

7. Pages

The Pages tab provides a workspace for opening and working on multiple files within a session, similar to a Notepad++ style editor. It allows users to create, open, edit, and switch between different pages such as configuration files, scripts, and text resources. Each page is associated with the active session, ensuring changes remain session-specific.

8. API Tester

API Tester is used to invoke and validate IBM Sterling OMS APIs directly from the Maegham OMS Development Kit. It allows users to select a configured OMS environment and execute APIs without requiring external tools. Users can construct request inputs, trigger API calls, and view responses for functional validation and troubleshooting. The tester supports both **Servlet** and **REST** based API executions. This feature helps developers quickly test integrations, debug issues, and verify OMS behavior during development.

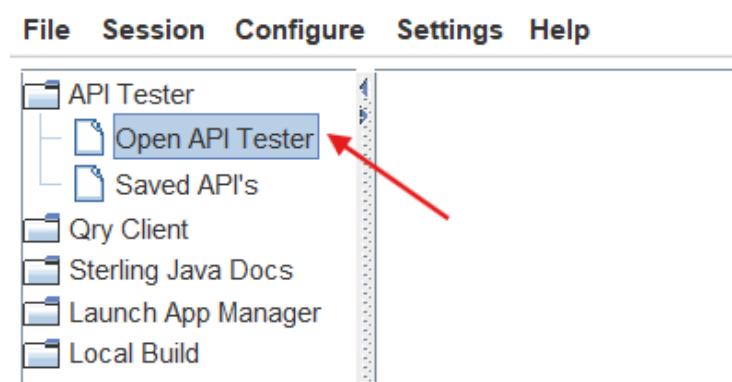


Figure 8.1: API Tester, then open API Tester

API Tester tab is opened

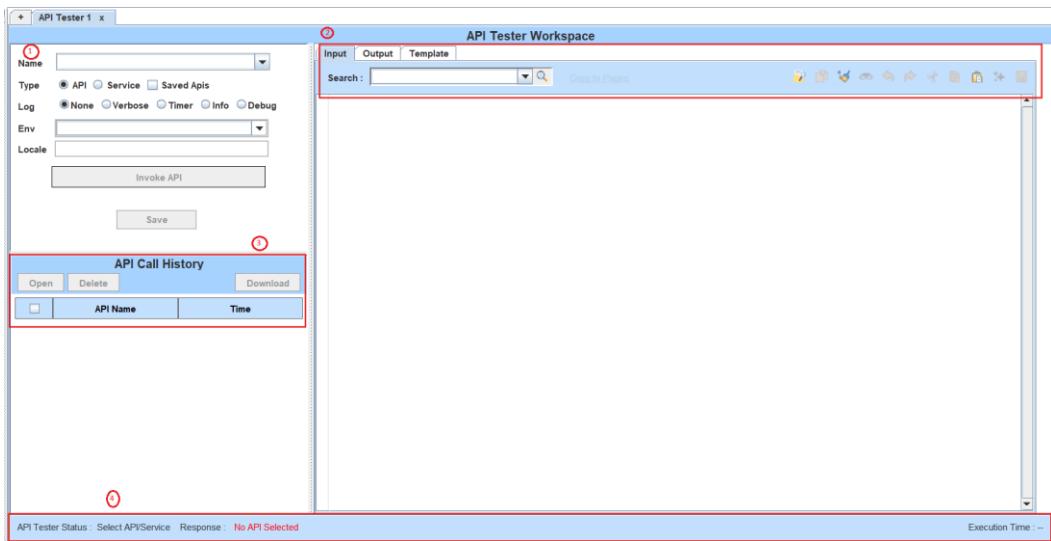


Figure 8.2: API Tester workspace

1. API Selection & Execution Panel (Left – Top)

This section is used to **select and configure the API execution**.

- **Name** – API or Service name selection
- **Type** – API / Service / Saved APIs
- **Log** – Logging level selection
- **Env** – OMS Environment selection
- **Locale** – Locale value
- **Invoke API** – Executes the API
- **Save** – Saves the API request

2. API Workspace Area (Right – Top)

This section is the **API working editor**.

- **Input** – Request XML editor
- **Output** – API response viewer
- **Template** – Default request templates
- **Search** – Search within editor content
- **Toolbar icons** – Editor actions (copy, paste, undo/redo, copy to pages, etc.)

3. API Call History Panel (Left – Middle)

This section displays **previously executed API calls**.

- **Open** – Opens a selected API execution
- **Delete** – Deletes API history

- **Download** – Downloads request/response
- **API Name** – Executed API name
- **Time** – Execution time

4. Status Bar (Bottom)

This section shows **execution status information**.

- **API Tester Status** – API selection status
- **Response** – Response availability
- **Execution Time** – Time taken for API execution

8.1 Saved API's

A Saved API is an OMS API request that has been stored for reuse in the API Tester. It contains the API name, input XML/JSON, environment, and execution settings. Saved APIs allow users to quickly re-execute frequently used API calls without rebuilding the request. They help maintain consistency during testing and debugging. Saved APIs can be searched, opened, edited, marked as favourite, or deleted.

Figure 8.1.1: Saved API's / Services

Name / Type / Session / Search With – Filters to search saved APIs or services.

Search – Executes the search based on selected filters.

Saved List – Displays saved APIs and services.

API / Service Name, Reference Name, Type, Favourite, Session – Details of each saved entry.

Open / Delete – Opens or deletes the selected saved API/service.

9. Query Client

Query Client is a utility used to execute **direct database queries** against the Sterling OMS database. It allows users to run SQL queries to fetch, verify, or analyze OMS data. The tool is mainly used for troubleshooting, validation, and data inspection. Results are displayed in a tabular format for easy review. It helps developers and support teams quickly understand backend data state.

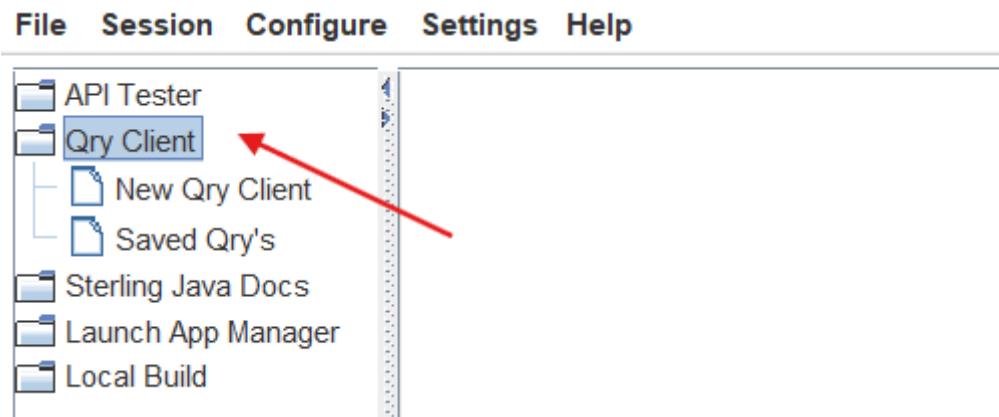


Figure 9.1: Qry Client, then new Query Client

Query client tab is opened

TRANSACTION_KEY	PROCESS_TYPE_KEY	TRANID	ACTIVITY_CODE	OWNER_KEY	TRANNAME	TRANTYPE	TRANGROUP	TRAN...
200307081424561197	200307081424551176	CHANGE_RECEIPT.0006	DEFAULT	Change Receipt	SYSTEM			
200307081424571199	200307081424385641	CLOSE_RECEIPT.0006	DEFAULT	Close Receipt	SYSTEM			
200307081424581205	200307081424551176	INSPECT_RECEIPT.0006	INSPECTION	Inspect	SYSTEM			
200307081424581210	200307081424551176	RECEIVE_RECEIPT.0006	RECEIVE	Receive	SYSTEM			
200307081424581215	200307081424551176	START_RECEIPT.0006	DEFAULT	Start Receipt	SYSTEM			
200307081424581222	200307081424551176	UNRECEIVE_RECEIPT.0006	DEFAULT	Unreceive	SYSTEM			
200307081424541155	200307081424521056	INCLUDE_IN_RECEIPT.0006	DEFAULT	Include in Receipt	SYSTEM			
200307081424541160	200307081424521056	PACK_SHIPMENT.0006	DEFAULT	Pack Shipment	SYSTEM			
200307081424551162	200307081424521056	PRINT_PICK_LIST.0006	DEFAULT	Print Pick List	SYSTEM			
200307081424551166	200307081424521056	PICKLISTPRG.0006	DEFAULT	Purge Pick List	SYSTEM			
200307081424551167	200307081424521056	SHIPMENTPRG.0006	DEFAULT	Purge Shipment	SYSTEM			
200307081424551168	200307081424521056	SHIPMENTHISTORYPRG.0006	DEFAULT	Purge Shipment History	SYSTEM			
200307081424551172	200307081424521056	SHIPMENT_MONITOR.0006	DEFAULT	Shipment Monitor	SYSTEM			
200307081424551173	200307081424521056	TASK_QUEUE_SYNCHER_O_D.0006	DEFAULT	Synchronize Task Queue	SYSTEM			
200307081424541129	200307081424521056	CHANGE_SHIPMENT.0006	DEFAULT	Change Shipment	SYSTEM			

Figure 9.2: Query Client workspace

1. Query Client Connect and schema (Right – Top)

- **Qry Client:** SQL editor used to run database queries directly on the OMS database.
- **Schema:** Selects the database schema to execute the query against.
- **Conn (Dev):** Shows the active database connection/environment.

2. Query Client Execution

- **Run:** Used to execute the SQL query written in the editor.
- **Editor Action:** Undo, Redo and Refresh button.
- **Save:** save the current changes made to SQL scripts, queries.
- **Open folder:** open sql file to run queries.

3. Query Result

- **Qry Result tab:** Displays the output of the executed query.
- **Response / Time Taken / Rows:** Execution status, query time, and number of records returned.
- **Result Grid:** Tabular data returned from the database

4. Editor area: Where SQL statements are written (e.g., `SELECT * FROM YFS_TRANSACTION;`).

9.1 Saved Query Client

Saved Qry Client stores frequently used SQL queries from the OMS Query Client. It allows users to reopen and reuse queries without rewriting them.

Click save button to current Query Client workspace. Pop up will show to save Query.

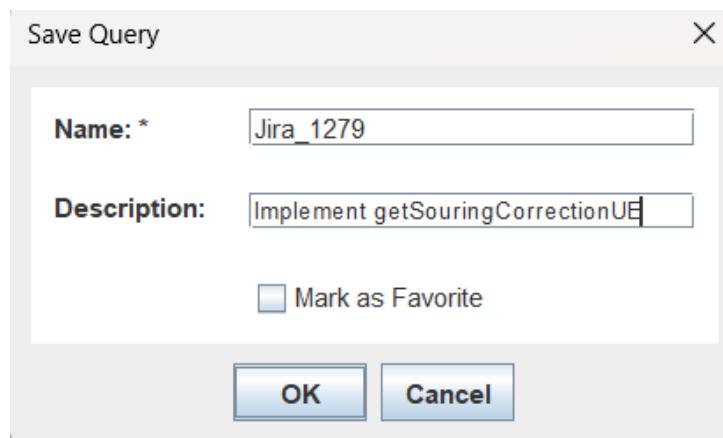


Figure 9.1.1: save query with name and description



Figure 9.1.2 Saved Qry's

Filter Section

- **Name:** Search saved queries by query name.
- **Filter – Favourites:** Shows only queries marked as favourite.
- **Session:** Filters queries saved under a specific session.
- **Search:** Retrieves saved queries based on the selected filters.
- **Open:** Opens the selected saved query in the Query Client.
- **Delete:** Deletes the selected saved query.

Saved Qry's List

- **Checkbox:** Selects a saved query for open or delete actions.
- **Name:** Name of the saved SQL query.
- **Description:** Purpose or details of the saved query.
- **Favourite:** Indicates whether the query is marked as a favourite.
- **Session:** Session under which the query was saved.
- **Date:** Date and time when the query was saved.

10. Sterling Docs

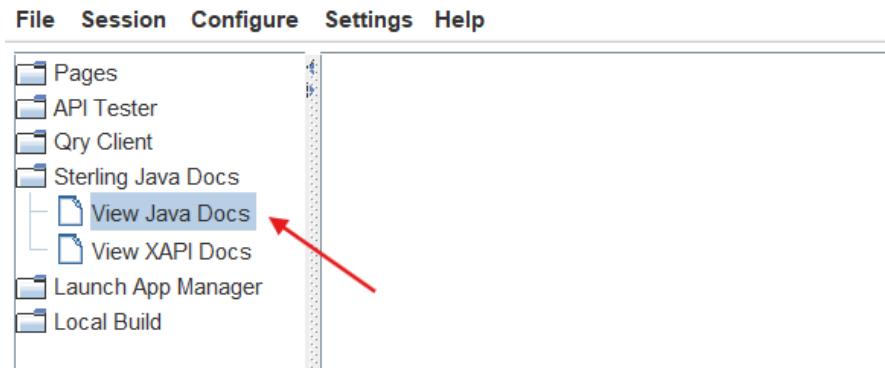


Figure 10.1: Sterling Java Docs

10.1 Java Docs

Sterling Java Docs is a reference view used to browse IBM Sterling OMS Java documentation within the tool.

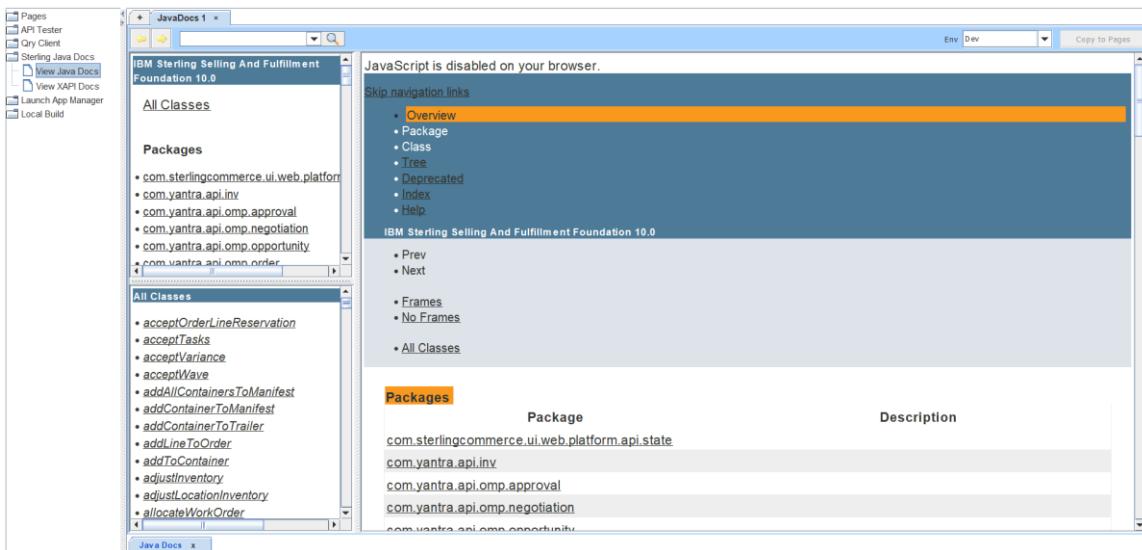


Figure 10.1.1: Sterling Java Docs

Search bar (top) – Used to quickly search for API's, attribute, UE, Event.

Environment selector (top-right) – Loads Java Docs for the selected OMS environment/version.

10.2 XAPI Docs

XAPI Docs provides documentation for Sterling OMS XML APIs (XAPIs). It lists all available OMS APIs with their request and response XML structures. Users can browse APIs by name and view input/output element definitions.

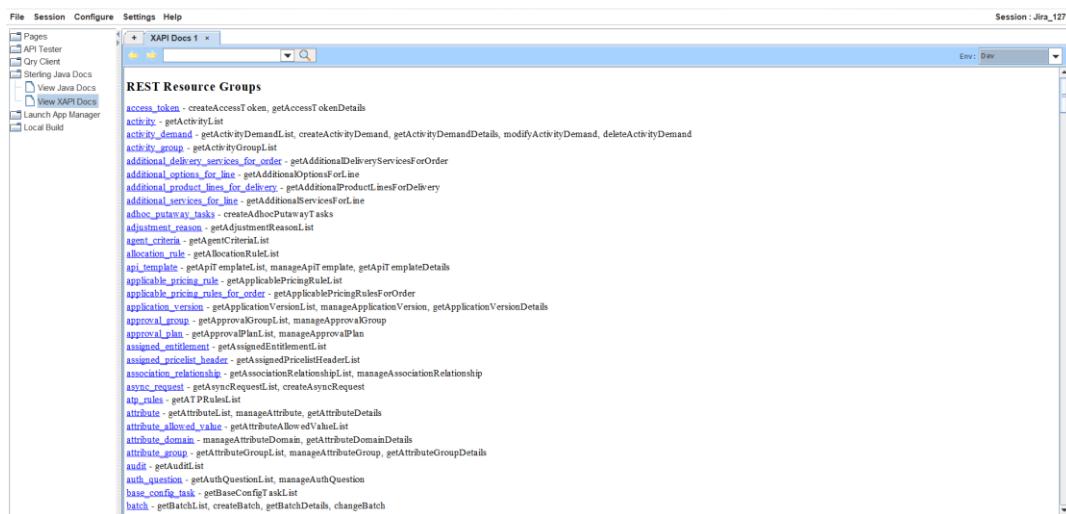


Figure 10.2.1: Sterling OMS XML API's

11. App Launcher

App Launcher is used to start and manage Sterling OMS applications from a single interface. It allows users to launch Application Manager, Sterling Management Console (SMC). It simplifies access without manually running scripts or URLs.

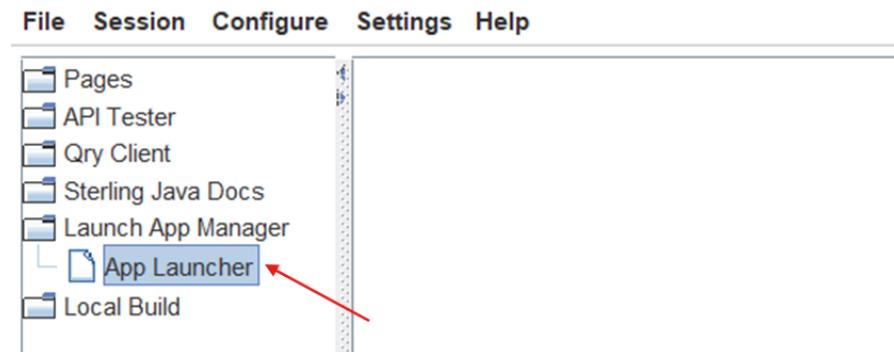


Figure 11.1: Launch App manager, then App Launcher

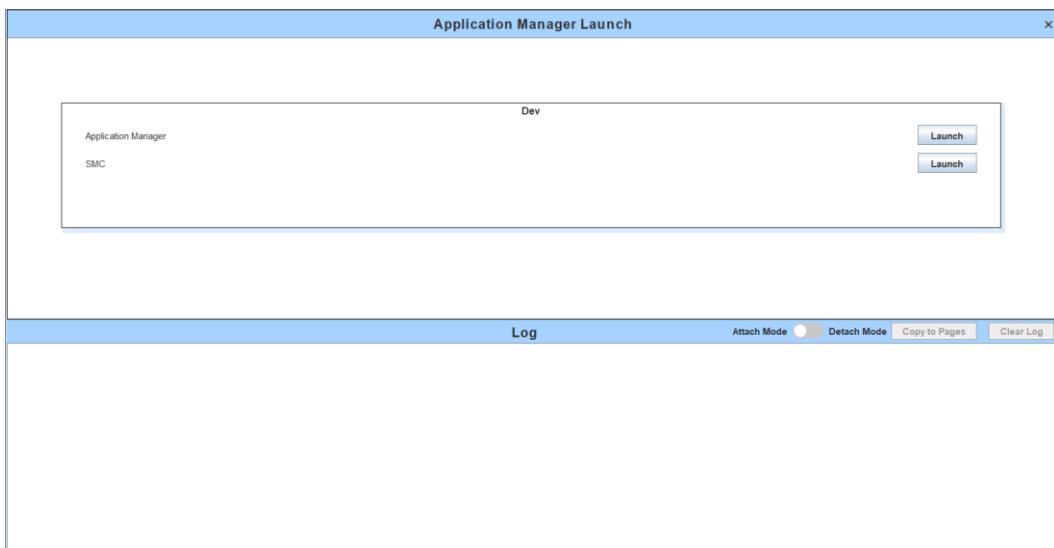


Figure 11.2: Application Manager Launcher

- **Environment section (Dev)** – Shows the selected OMS environment.
- **Application Manager** – Launches the Sterling OMS Application Manager console.
- **SMC** – Launches the Sterling Management Console.
- **Launch buttons** – Starts the selected application in a browser or client.
- **Log panel** – Displays launch status, logs, and execution messages
- **Attach Mode** – Runs the application with logs streamed live in the log panel.
- **Detach Mode** – Runs the application in the background without streaming logs on screen.
- **Open Log Folder** – Opens the local directory where application logs are stored.
- **Copy Log** – Copies the displayed log content to Pages for reference.

12. Local Build

Local Build – Used to manage OMS locally, allowing users to start/stop servers in attach or detach mode, install or uninstall third-party JARs, build EAR/WAR files, execute custom commands, and launch applications directly from the tool.

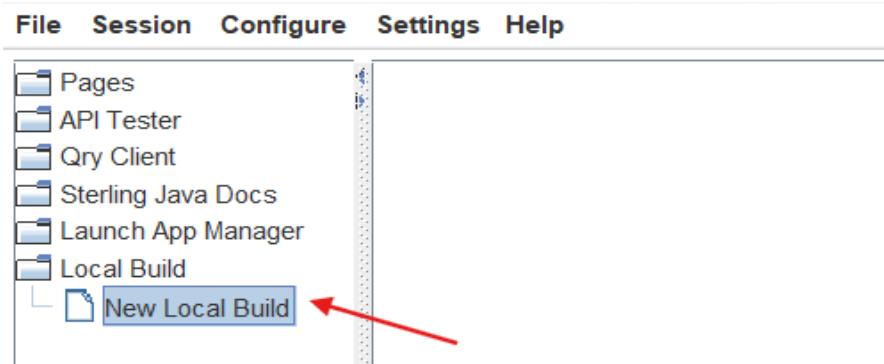


Figure 12.1: local build, then New Local build

Local build tab is opened

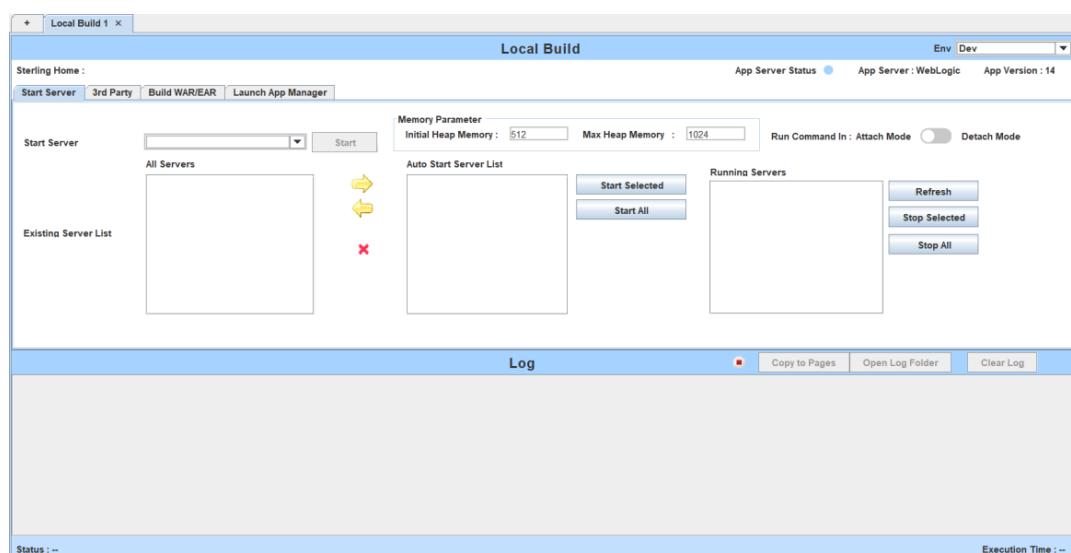


Figure 12.2: Local build

Top Section

- **Sterling Home:** The installation path for Sterling OMS.
- **Env (Dropdown):** Allows selection of the environment (e.g., Dev, Local).
- **App Server Status:** Shows the current status of the selected application server.
- **App Server:** Displays the type of server (here, WebLogic).
- **App Version:** The version of the application (here, 14).

12.1 Start Server

User can start, stop, and monitor servers, configure memory, and manage auto-start settings. It also shows server status and logs.

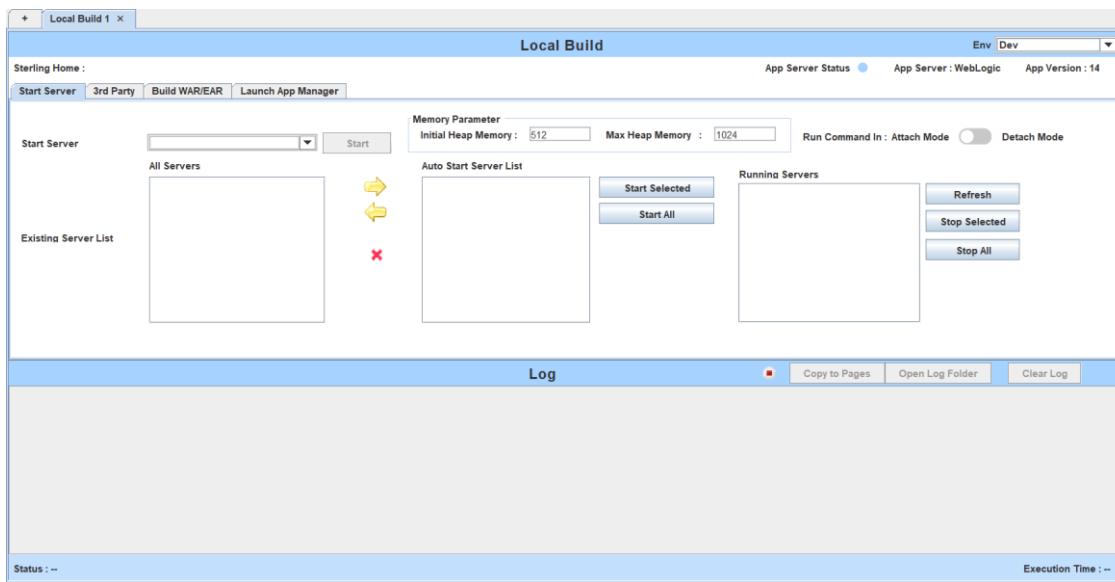


Figure 12.1.1: start server

1. Start Server

- Enter server name / use dropdown to select which server you want to start.
- **Start Button:** Launches the selected server.

2. Existing Server List

- Shows all available servers configured in Sterling OMS.
- **Arrow Buttons:** Move servers between the existing list and the auto-start list.
- **Red Cross:** Remove server from auto-start or existing list.

3. Auto Start Server List

- Servers added here will be started automatically.
- **Start Selected:** Starts only the selected servers from this list.
- **Start All:** Starts all servers listed here.

4. Running Servers

- Displays currently running servers.
- **Refresh:** Updates the running server list.
- **Stop Selected:** Stops selected servers from the running list.
- **Stop All:** Stops all running servers.

Memory Parameter

- **Initial Heap Memory:** Minimum memory allocated to JVM (default 512 MB).
- **Max Heap Memory:** Maximum memory JVM can use (default 1024 MB).

Run Command Mode

- **Attach Mode / Detach Mode:** Determines how the server process runs relative to the console.
 - **Attach Mode:** Runs in the current console.
 - **Detach Mode:** Runs in the background.

Log Section

- Displays real-time log of server start/stop actions.
- **Copy to Pages:** Copies log output to other tabs/pages.
- **Open Log Folder:** Opens folder containing server logs.
- **Clear Log:** Clears the displayed log.

12.2 3rd Party JAR

User can install/ uninstall jar, open dynamic file in local. It also shows status and logs.

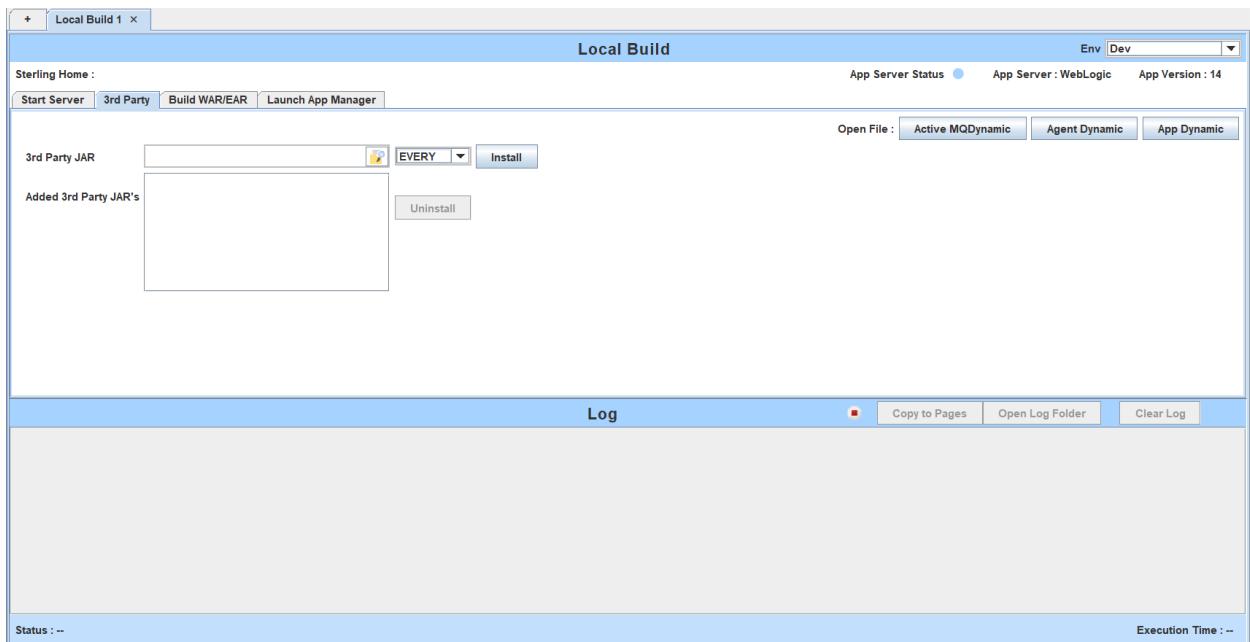


Figure 12.2.1: Third Party Jar

3rd Party JAR

- Text box where you can specify the path to a third-party JAR file you want to install into the Sterling environment.

Added 3rd Party JAR's

- List box showing all 3rd party JARs that have already been added.
- You can select a JAR here to uninstall it (though the **Uninstall** button is currently disabled in the screenshot).

Open File Section (Active MQDynamic / Agent Dynamic / App Dynamic)

- Buttons to open configuration files related to ActiveMQ, Agent, or App Dynamic classpaths for further modifications.

Log Panel (bottom)

- Displays the execution status of actions such as installing JARs.
- Buttons for copying log, opening log folder, and clearing log are present.

12.3 Build WAR/ EAR

User can select a WAR or EAR file and build a new EAR or WAR. They can also include entity or resource JARs in the build. Additionally, a backup of the original file is taken in the local directory.

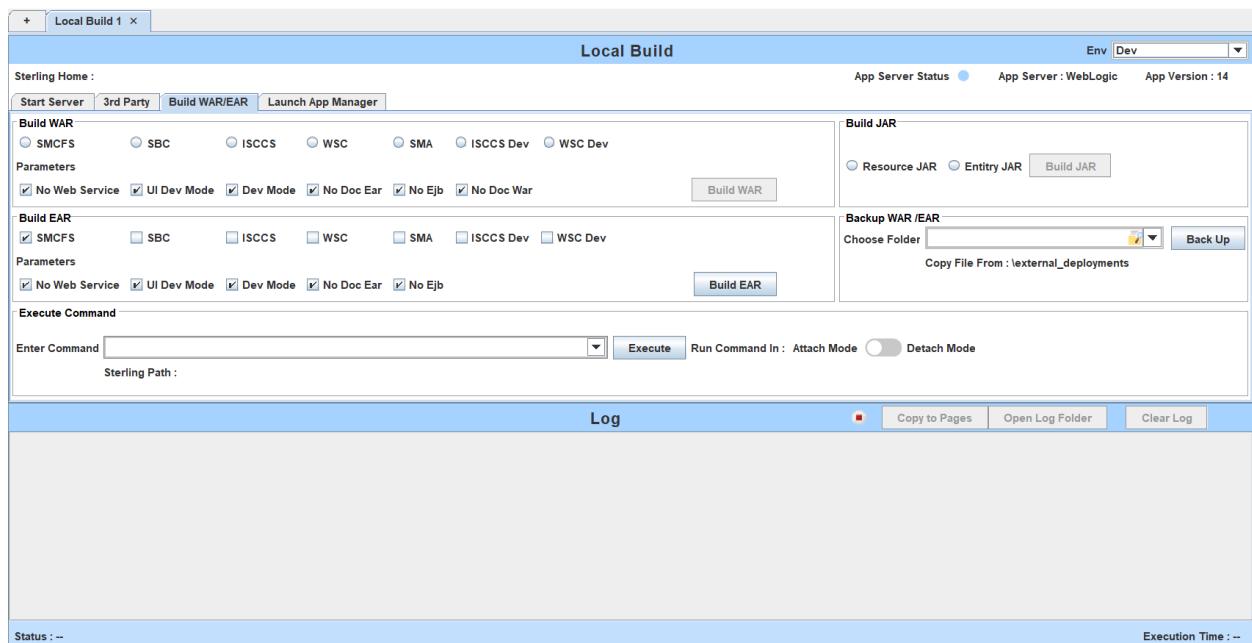


Figure 12.3.1: Build WAR/EAR

Log Panel

- Displays the execution status of actions such as Build command.
- Buttons for copying log, opening log folder, and clearing log are present.

12.4 Launch App Manager

App Launcher is used to start and manage Sterling OMS applications from a single interface. It allows users to launch Application Manager, Sterling Management Console (SMC).

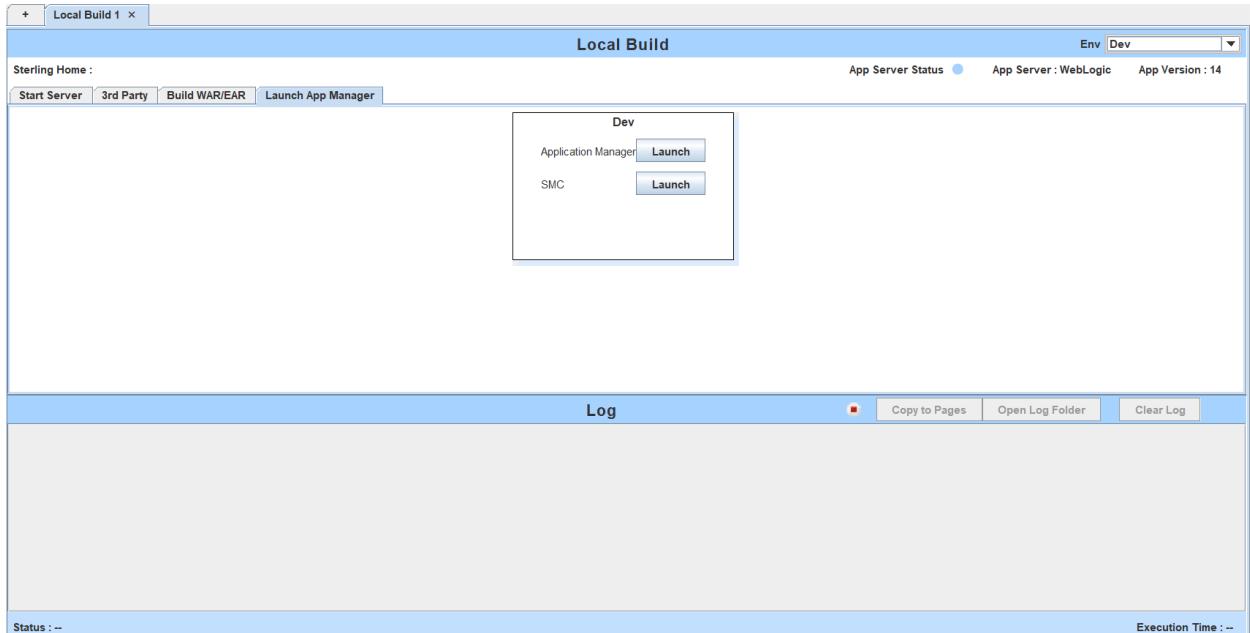


Figure 12.4.1: Launch App manager

- **Environment section (Dev)** – Shows the selected OMS environment.
- **Application Manager** – Launches the Sterling OMS Application Manager console.
- **SMC** – Launches the Sterling Management Console.
- **Launch buttons** – Starts the selected application.
- **Log panel** – Displays launch status, logs, and execution messages
- **Attach Mode** – Runs the application with logs streamed live in the log panel.
- **Detach Mode** – Runs the application in the background without streaming logs on screen.
- **Open Log Folder** – Opens the local directory where application logs are stored.
- **Copy Log** – Copies the displayed log content to Pages for reference.